

ROYPOW TECHNOLOGY CO., LTD. has a policy of improving products continuously. All the information in this catalogue is provided for reference only. We reserve the right to make revisions as well as product alterations and improvements at any time without prior notice. Trademarks are the property of ROYPOW TECHNOLOGY CO., LTD. or their respective owners. Technical data and illustrations are not binding. We assume no liability for misprints.

Version: September 08, 2025, ROYPOW X250KT



ROYPOW Technology Co., Ltd.

Tel: +86 (0)752-327 9099

Email: sales@roypow.com
service@roypow.com
marketing@roypow.com

Web: www.roypow.com

Add: ROYPOW Industrial Park, No.16, Dongsheng South Road,
Chenjiang Street, Zhongkai High-Tech District, Huizhou City,
Guangdong Province, China

ROYPOW (USA) Technology Co., Ltd.

Tel: +1 512 688 5555 (Texas Office)

Email: sales@roypowusa.com

Email: service@roypowusa.com

Web: www.roypow.com

Head Office: 5901 Triumph St, Commerce, CA 90040, USA

Texas Office: 2350 Campbell Creek Blvd #100 Richardson, TX 75082, USA

Florida Office: 277 Douglas Avenue, Unit 1004, Altamonte Springs, FL 32714, USA

Indiana Office: 5545 W Raymond St, Ste H Indianapolis, IN 46241, USA

Georgia Office: 1150 Cobb International Pl NW Ste A, Kennesaw, GA 30152, USA

ROYPOW Technology UK Limited

Tel: 079 3818 1019 / 07425566908

Email: sales.uk@roypow.com

Add: Regus Green Park, 200 Brook Dr, Reading RG2 6UB, UK

ROYPOW Australia Technology Pty Ltd

Email: sales@roypowtech.com.au

Tel: +61 29185 0814

Web: www.roypowtech.com.au

Add: Unit 9/148 James Ruse Dr, Parramatta 2150, NSW, Australia

ROYPOW (Europe) Technology B.V.

Email: sales.eu@roypow.com

Tel: +31 702 001 114

Web: www.roypoweurope.com

Add: K.P. van der Mandelelaan 84, 3062 MB Rotterdam, The Netherlands

ROYPOW Technology GmbH

Tel: +49 (0) 176 2358 8956

Email: sales.de@roypow.com

Web: www.roypow.gmbh

Add: Rosa-Parks-Straße 4, 64295 Darmstadt, Germany

ROYPOW株式会社

Tel: +81 090 7092 6969

Email: sales.jp@roypow.com

Web: www.roypow.co.jp

Add: 〒271-0094 千葉県松戸市上矢切299- 7

ROYPOW Technology Co., Ltd (Korea)

Tel: 1555-2016

Email: sales.kr@roypow.com

Add: 2405, GIDC Gwangmyeong station A Dong, 43 Iljik-ro,
Gwangmyeong-si, Gyeonggi-do, Korea

ROYPOW Battery Technology (Pty) Ltd

Email: sales.za@roypow.com

Tel: +27 10 900 5808

Add: 53 Lake Rd, Longmeadow Business Estate, Edenvale, 1609, South Africa

PT ROYPOW HIGHTECH INDONESIA

Add: Horizon Industrial Park Factory, Type A, Lot 05, Sungai Pelunggut
Sub-district, Sagulung District, Batam City, Riau Islands Province, Indonesia



YOUR ENERGY SAVING EXPERT

X250KT

DG + ESS Solution

Saving Up To
30% In Fuel Consumption



250 kW

✉ sales@roypow.com
🌐 www.roypow.com



ROYPOW

For One-stop New Energy Solutions

- R&D, manufacturing and sales of motive power systems and energy storage systems as one-stop solutions
- Fully automatic production lines, a full range of test equipment and an advanced MES
- Covering Complete Power Solutions for Off-Road Vehicles, Marine Power System, Jobsite ESS, Vehicle-Mounted ESS, and Electric Retrofit Solutions
- Self-development of power electronics technologies, including PCS, BMS, and EMS, as well as motor and controller motion control algorithms



750+ Employees
200+ R&D People
105,000 m² Headquarters Floor Area
2,500 m² Testing Center
295 Patents

Quality Control Certificates:

- ✓ Environmental Management System: ISO 14001:2015
- ✓ Occupational Health and Safety Management System: ISO 45001:2018
- ✓ Quality Management System: ISO 9001:2015, IATF16949:2016
- ✓ Information Security Management System: ISO/IEC 27001:2022
- ✓ Social Accountability Management System: SA8000:2014
- ✓ Hazardous Substance Process Management: IECQ QC 080000




Product Certifications:


UL 1973, UL 9540A, UL 9540, UL 2580, UL 2271, UL 1741			FCC, IEC/EN 61000-6, BS EN IEC 61000-6
IEEE 1547			IEC 60730, ISO 13849-1
IEC 62619			UN 38.3
EN 62477, EN 62040, (EU) 2023/1542, EN 62109-1, EN 62109-2			RoHS Directive 2011/65/EU & (EU) 2015/863

R&D and Manufacturing Highlights


As a result of these investments, ROYPOW is capable of "end-to-end" integrated delivery, making our products out-perform the industry norms.



Global Sales and Service Network



ROYPOW has comprehensively unfolded its overseas market layout to ensure the localization of R&D, manufacturing, marketing and service, becoming one of your most reliable and valuable partners.

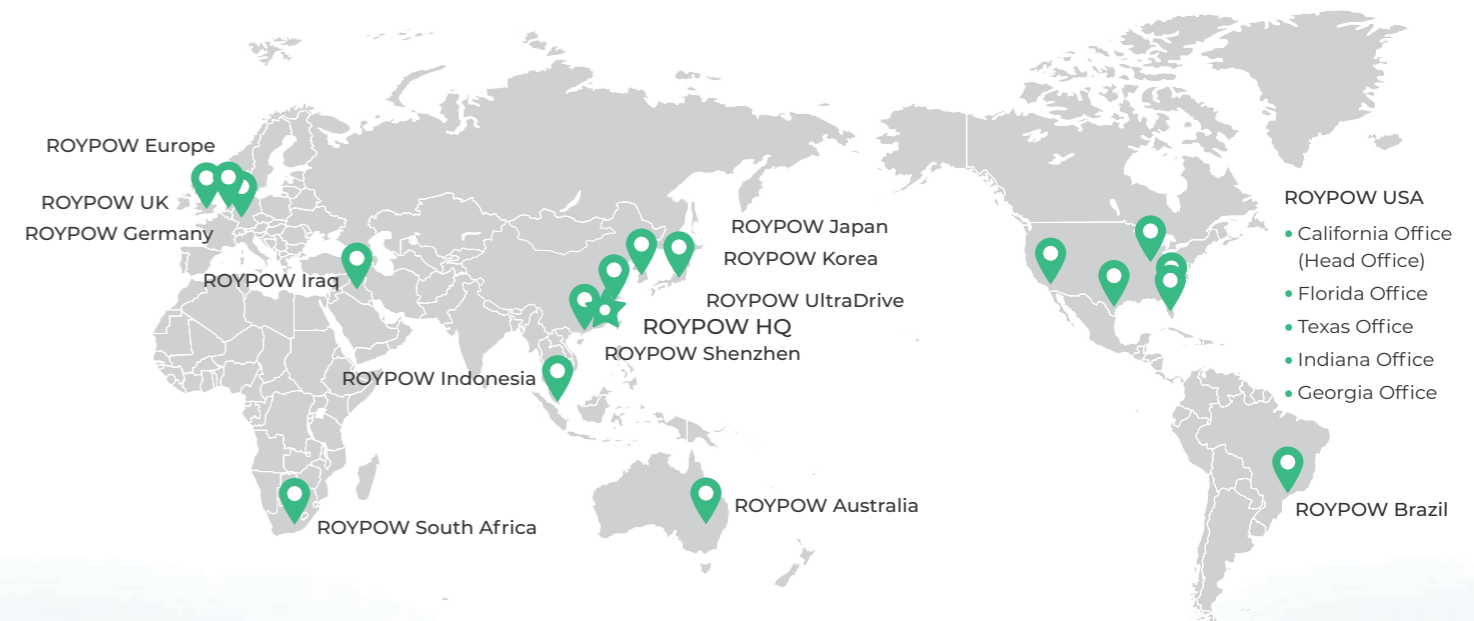

Upgrading to New Technology, with Our Turnkey Solutions.

With years of dedication to new energy solutions, we are proud to offer customers professional solutions for:

- Complete Power Solutions for Off-Road Vehicles
- Marine Power System
- Jobsite ESS
- Vehicle-Mounted ESS
- Electric Retrofit Solutions
- Residential and C&I ESS



High Power Motors have been widely used in industries, such as construction, mechanical manufacturing, mining, rail transit, petrochemical, etc.



How to choose a DG

Assumed load: **Peak Power: 530 kW**, **Rated power: 200 kW**

Traditional Proposal

If a Diesel Generator is adopted as power source:



Initial Overpurchase for a high power DG is necessary to match the maximum starting current of the motors



High Fuel Consumption is certain because of frequent motor starts and long-term operation at low power



Capacity Expansion is not possible for the conventional diesel generators



High Maintenance Costs due to frequent motor starts and high inrush current



Not suitable due to the high starting current of the load

The All-New ROYPOW X250KT System

Saves energy and makes Diesel Gen Sets more efficient



ROYPOW Proposal



No need to purchase high capacity DG due to the mutual power output from X250KT



Hybrid Solution



Lower initial investment for a low-power DG



Lower fuel consumption



Support multiple DGs working in parallel




Lower maintenance costs



30% Savings on Diesel Fuel Consumption

ROYPOW X250KT intelligently and efficiently manages the output power of the engine at 50% to 70% of the rated power of the DG, ensuring that the DG operates at the lowest fuel consumption rate and helping achieve fuel consumption reduction.

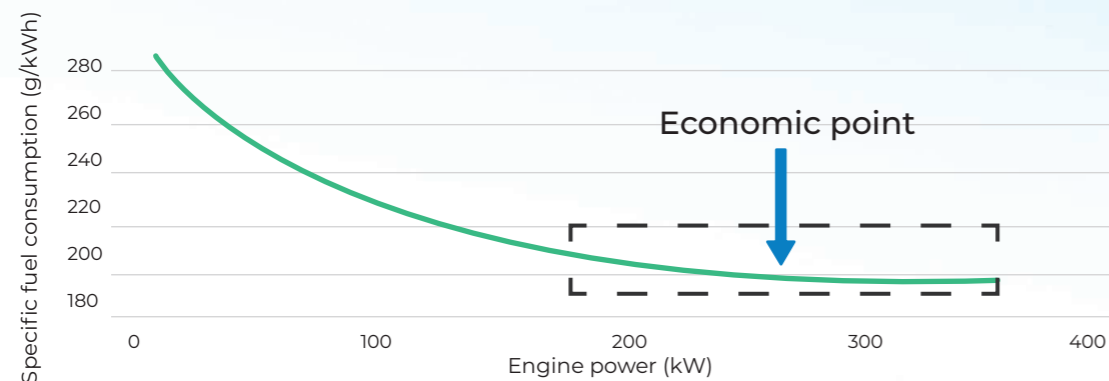

Relationship between engine power and fuel consumption



250 kW Output

ROYPOW X250KT supports up to 250 kW continuous power output for 30 seconds to address the issues of high motor startup currents and load impacts, extending the lifespan of diesel generators, reducing failure rates, and decreasing maintenance frequency and costs.




Saving
30%
Fuel Consumption



Two Working Modes


Hybrid Mode (X250KT + DG)

ROYPOW X250KT and diesel generator set work in parallel to power the load. Suitable for projects requiring high loads and extended power supply duration.

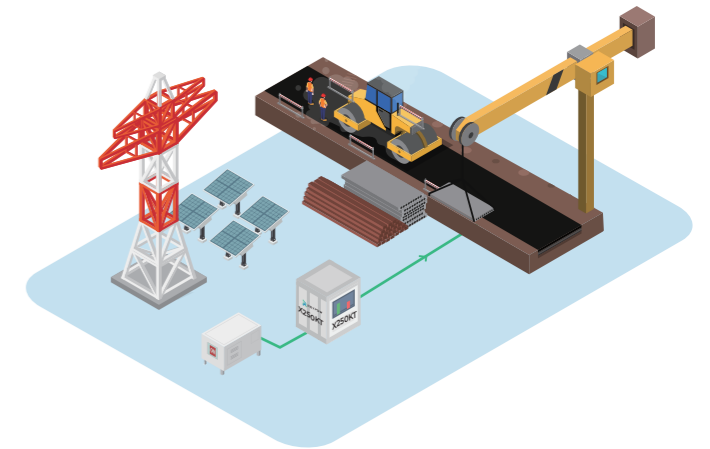


Off-Grid Mode

When the diesel generator fails, ROYPOW X250KT ensures continuous and uninterrupted power to the loads and improves the quality of the power supply.

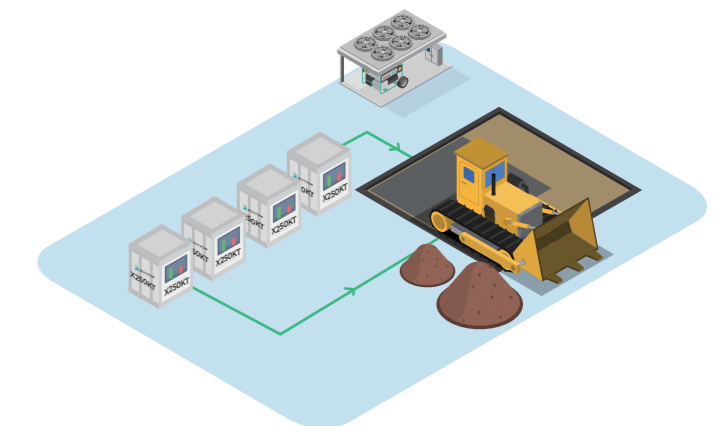

AC-Coupling

X250KT can connect with PV, Grid or Diesel Generator for charge and discharge functionality.

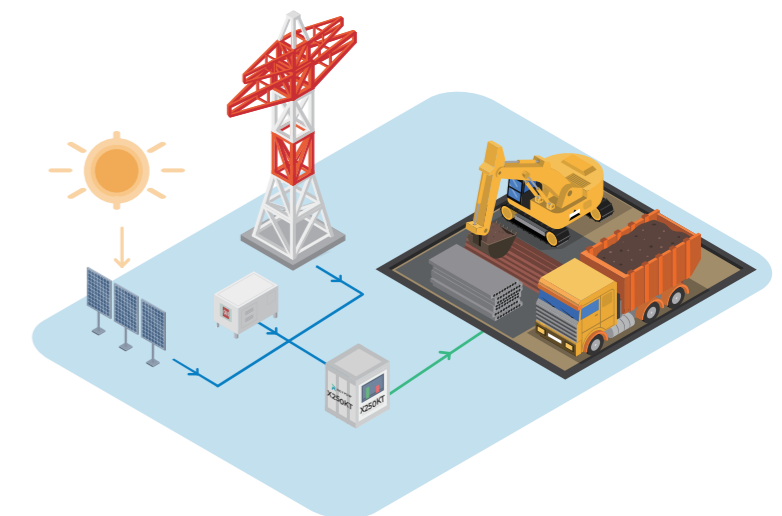



Quality Design. Lasting Reliability.



All-In-One Modular Design

Integrates the powerful and efficient battery, SPCS, and SEMS into one unit



Plug & Play

Ensures easy installation, convenient maintenance, and flexible expansion of up to 4 units.



Rapid Deployment

Supports frequent lifting and forklift transportation for rapid deployment.



Adapt to Various Environments

Highly waterproof and dust-proof to maintain stable performance under various weather conditions.



Integrated Alert & Warning System

Equipped with a comprehensive safety package, including a fire extinguishing system, to ensure timely warnings and worry-free safety.




Up to 8 Sets Parallel



Supports up to 8 sets of units working in parallel, with the energy capacity reaching Up to 2MWh / 1228.8kWh for high loads.

ROYPOW X250KT

System Topology

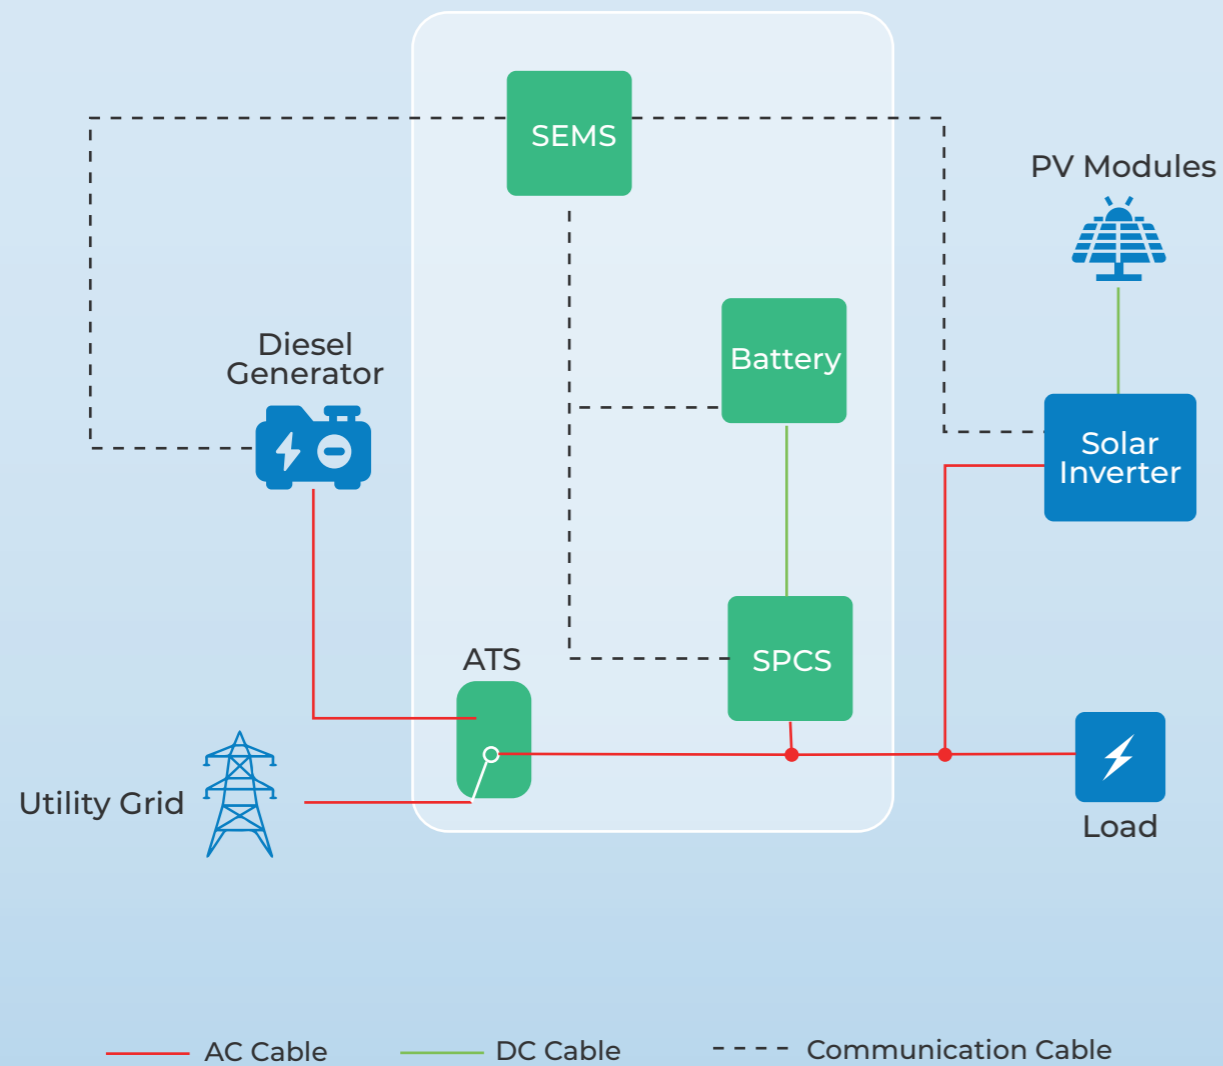

System Composition of ROYPOW X250KT

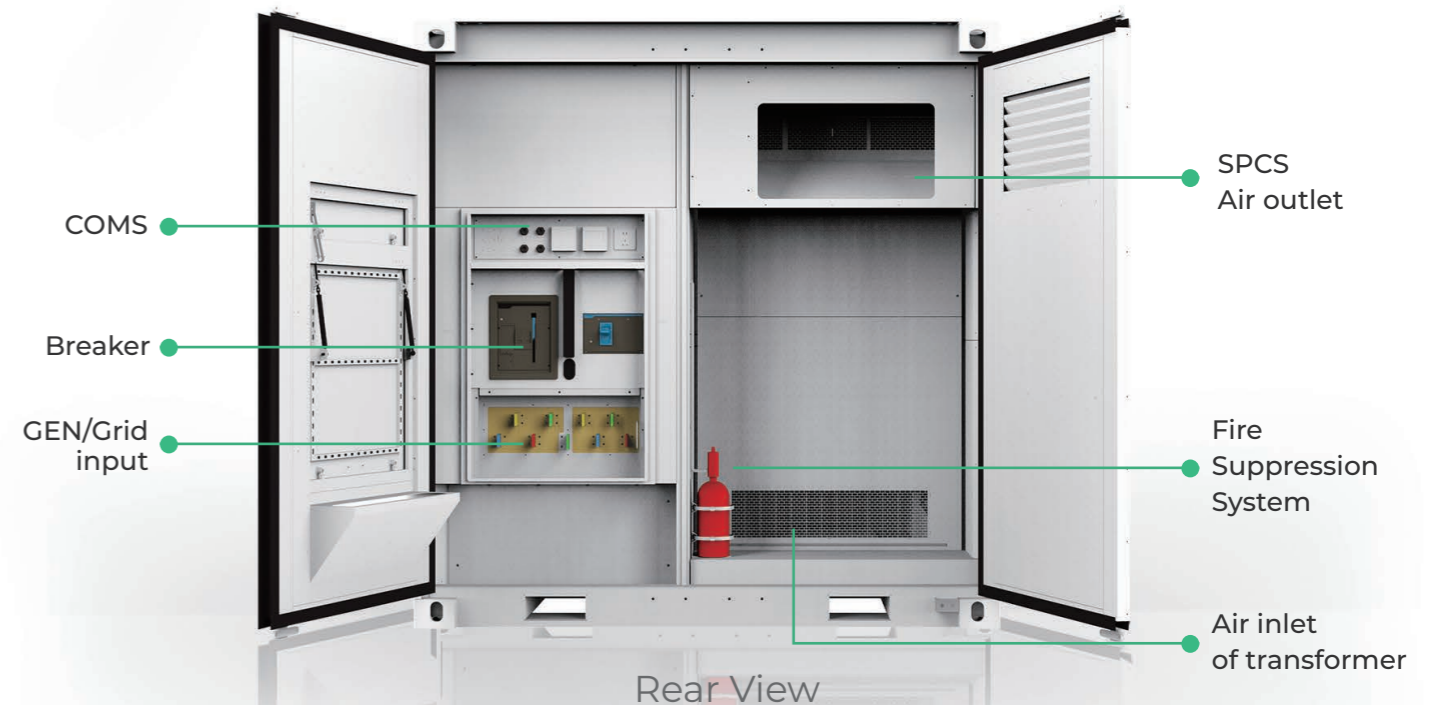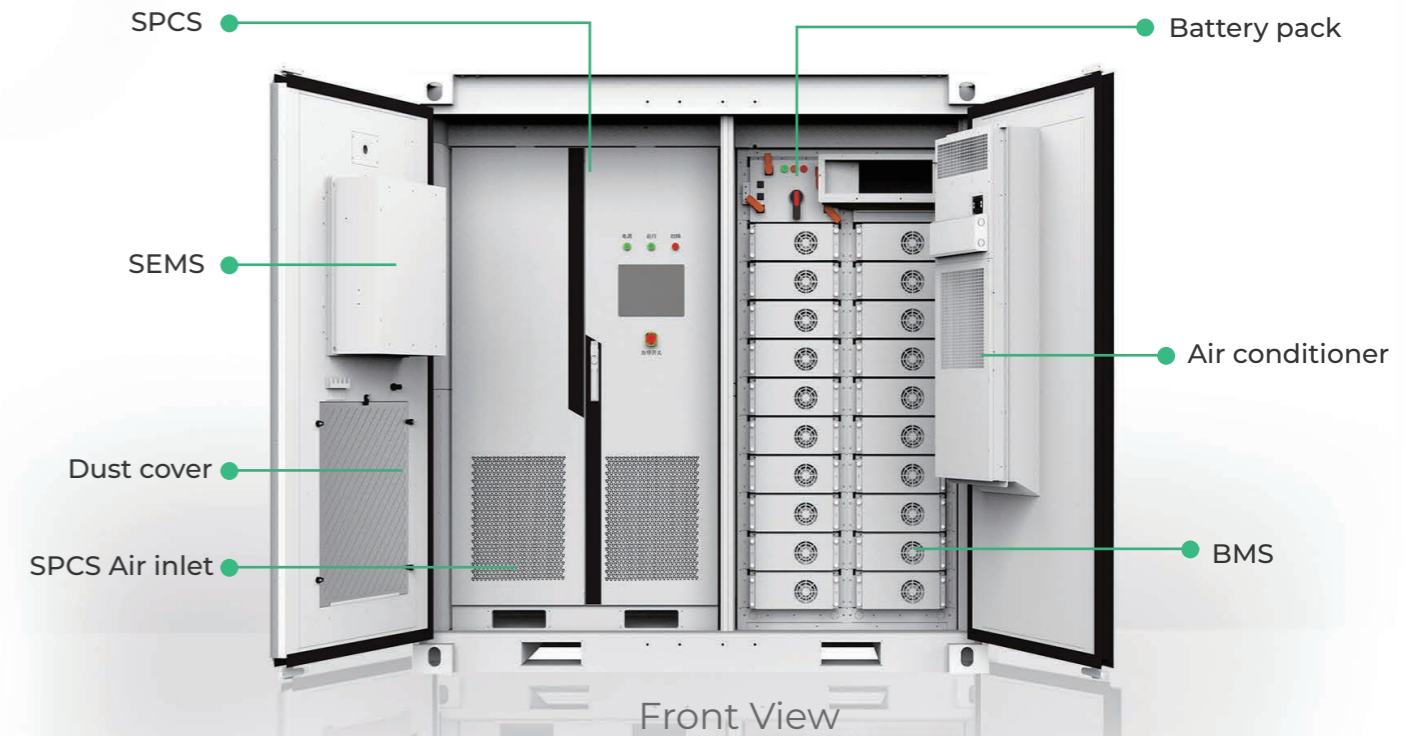

Special Power Conversion System (SPCS)

The SPCS controls the charge/discharge process of the battery pack. It can not only connect to the grid to achieve AC/DC conversion but also operate independently off the grid to directly supply power to AC load.

- Supports up to 4 sets of parallel use
- Equipped with multiple fault protection mechanisms
- Works with the diesel generator to power the loads

LiFePO₄ Battery Energy Storage System (BESS)

Equipped with advanced LiFePO₄ BESS - safer, more stable, and more eco-friendly than other lithium chemistries, the ROYPOW X250KT system ensures quality power and energy reliability for worksites.

- High-Power & High-Efficiency Output
- Built-in Battery Management System (BMS) for Intelligent Control and Protections
- Long Cycle Life & Design Life
- 5 Years Warranty

Smart Energy Management System (SEMS)

The SEMS coordinates the battery pack, SPCS, BMS, and others into a complete system, responsible for data acquisition, monitoring and analysis, and energy scheduling for efficient energy usage.

- Integrated Energy Scheduling Algorithms
- High Compatibility & Flexibility
- Improved System Reliability & Efficiency
- Intuitive Monitoring & Friendly Remote Control via Web and APP




Application Scenarios of ROYPOW X250KT



ROYPOW

X250KT System

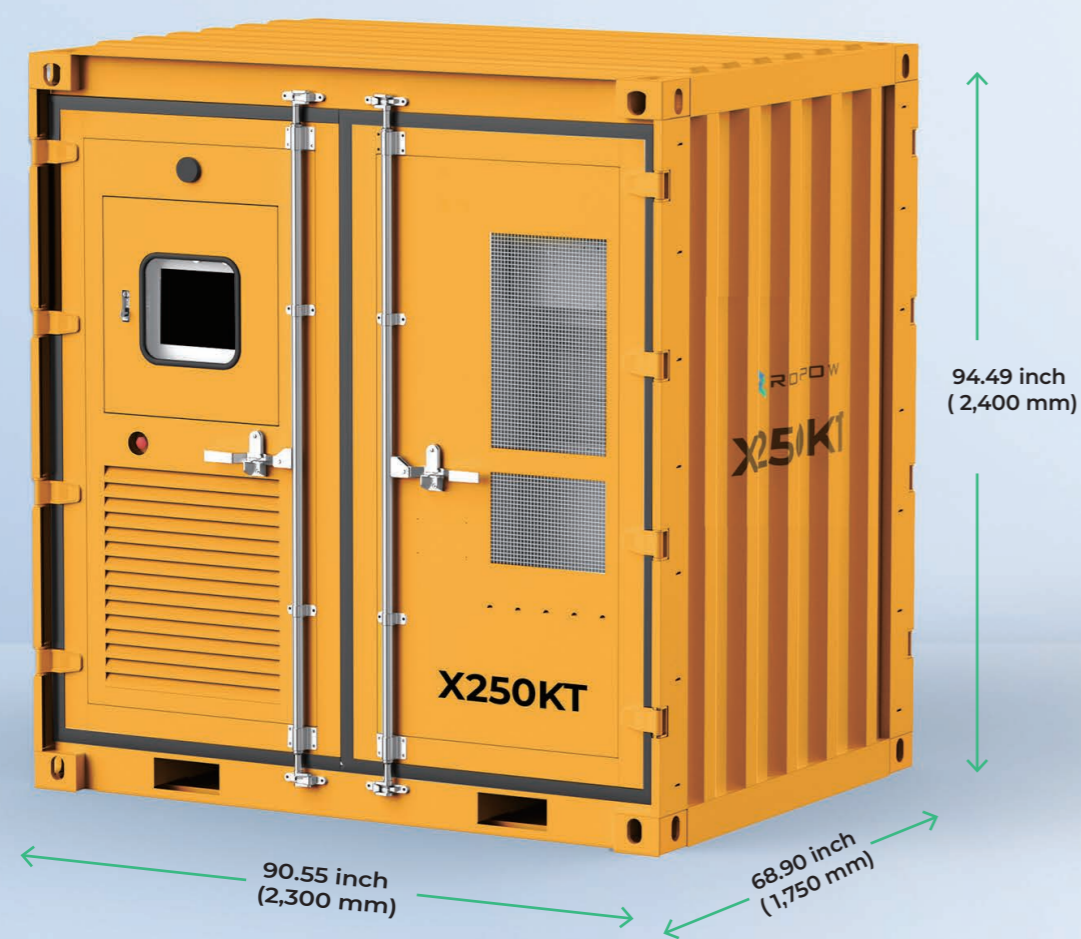

Technical Specifications

Model	X250KT-U/A		X250KT-E/A	
AC Output Data (On-grid Mode)				
Rated Power	150 kW		150 kW	
Max. Rated / Apparent Power	250 kW / 280 kVA ^[1]		Overload Capacity (kW)	250 kW / 180s
Rated Voltage	480 V (±15%)		400 V (±15%)	
Rated Current	183 A		220 A	
Grid Frequency	60 Hz		50 Hz	
AC Connection	3 W + N		3 W + N	
THDI	≤ 3%		≤ 3%	
Power Factor	-1 ~ +1		-1 ~ +1	
AC Output Data (Off-grid Mode)				
Rated Power	250 kW		150 kW	
Max. Rated / Apparent Power	250 kW / 250 kVA ^[1]		Overload Capacity (kW)	250 kW / 180s
Rated Voltage / Frequency	480 V / 60 Hz		400 V / 50 Hz	
THDV (Linear Load)	≤3%		≤3%	
Battery Data				
Battery Chemistry	LiFePO ₄		LiFePO ₄	
Nominal Energy	153.6 kWh		153.6 kWh	
Working Voltage Range	600V ~ 876V		600 V ~ 876 V	
Nominal Charging Current	100 A		100 A	
Nominal Discharging Current	200 A		200 A	
Max. Discharging Current	300 A		300 A	
DOD	90%		90%	
Compatible Diesel Generator				
Rated Power	≤400 kVA		≤400 kVA	
Rated Voltage	480 V		400 V	
Rated Frequency	60 Hz		50 Hz	
General				
Parallel Capable	Yes (Up to 8)		Yes (Up to 8)	
EMS	SEMS3000 12 inch LCD Touch Panel		SEMS3000 12 inch LCD Touch Panel	
Ingress Rating	NEMA 3R		IP54	
Topology	Transformer		Transformer	
Working Temperature	-4 ~ 131°F (-20 ~ 55°C)		-4 ~ 122°F (-20 ~ 50°C)	
Storage Temperature	-40 ~ 149°F (-40 ~ 65°C)		-40 ~ 149°F (-40 ~ 65°C)	
Relative Humidity	5 ~ 95% (No condensing)		5 ~ 95% (No condensing)	
System Noise	<65 dB		<65dB	
Cooling	Intelligent temperature control (Battery room) Air cooling (Inverter room)			
Fire Suppression System	Included		Included	
Altitude	5,000 (>3,000 derating)		5,000 (>3,000 derating)	
Dimensions, LxWxH	90.55 x 68.90 x 94.49 inch (2,300 x 1,750 x 2,400 mm)			
Weight	11684.5 lbs (5,300 kg)		0,361.72 lbs (4,700 kg)	

[1] Depends on the output power of the battery system.
All pictures shown are for reference only and data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions. Only authorized personnel are allowed to operate or make adjustments to the batteries. We reserve the right to make revisions as well as product alterations and improvements at any time without prior notice.